

# LANCOM GS-1326

## Quick Reference Guide




Please observe the following when setting up the device

- > Mount the device into a 19" unit in a server cabinet
- > For devices to be operated on the desktop, please attach the adhesive rubber footpads
- > Do not rest any objects on top of the device



- > Ensure that the ventilation slots remain unobstructed

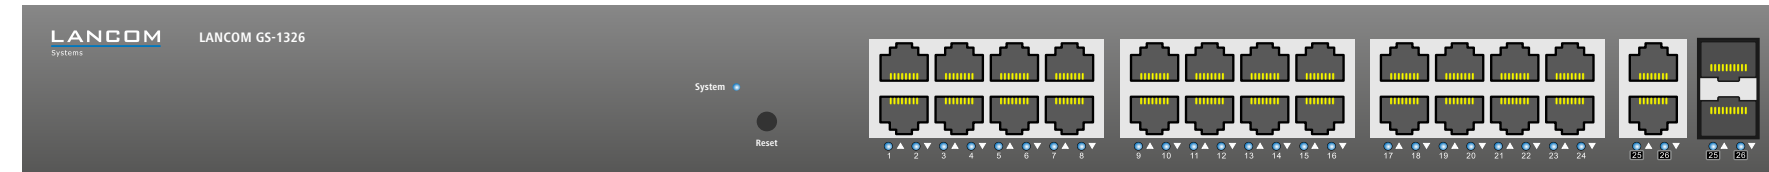

① **Power connector**  
Supply power to the device via the power connector in the back. Please use the IEC power cable supplied.



② **TP Ethernet ports**  
Connect one of the TP Ethernet ports 1-26 via an Ethernet cable with your end device or another LAN switch.




③ **SFP ports**  
Insert a suitable SFP module (e.g. 1000Base-SX or 1000Base-LX) into the SFP port. Choose a cable compatible with the SFP module and connect it as described in the module's documentation..



! Ports 25 and 26 are combo ports. Either the TP- or the SFP port can be used.

MOUNTING AND CONNECTING THE DEVICE

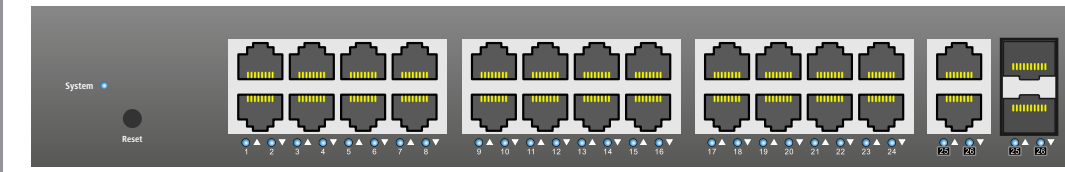

① ②

① **System**

Off	Device switched off
Green	Device operational

② **Reset Button**

5 seconds pressed	Restart of the device
10 seconds pressed	Reset and restart of the device

③

③ **TP Ethernet Ports**

Off	Port inactive
Green	Link 1000 Mbps
Orange	Link ≤ 100 Mbps

④ **SFP Ports**

Off	Port inactive
Green	Link 1000 Mbps
Orange	Link ≤ 100 Mbps

④

Hardware	
Power supply	Internal power supply unit (110–230 V, 50-60 Hz)
Power consumption	23 watts
Environment	Temperature range 0–40 °C; humidity 10–90 %; non-condensing
Housing	Robust metal housing, 19" 1U (442 x 44 x 170,3 mm > W x H x D) with removable mounting brackets, network connectors on the front
Number of fans	None; fanless design without rotating parts, high MTBF
Interfaces	
ETH	> 24 TP Ethernet ports 10 / 100 / 1000 Mbps > 2 combo ports (TP/SFP) with 100 / 1000 Mbps (SFP) and 10 / 100 / 1000 Mbps (TP) > 26 concurrent Ethernet ports in total
Declaration of Conformity	
Hereby, LANCOM Systems declares that this device is in compliance with Directives 2014/30/EU and 2014/35/EU. The full text of the EU declaration of conformity is available at the following internet address: <a href="http://www.lancom-systems.com/ce/">www.lancom-systems.com/ce/</a>	
Package Content	
Documentation	Quick Reference Guide (DE/EN), Installation Guide (DE/EN)
Mounting brackets	Two 19" brackets for rackmounting
Cable	IEC power cord

LANCOM, LANCOM Systems and COS are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. Subject to change without notice. No liability for technical errors and/or omissions. 111740917