


LANCOM GS-2310

Quick Reference Guide



- ① **Serial connector (Console)**
Connect the serial interface via the included serial configuration cable to the serial interface of the device you want to use for configuring / monitoring the switch.
- ② **TP Ethernet ports**
Connect one of the TP Ethernet ports 1-10 via an Ethernet cable to your end device or another LAN switch.

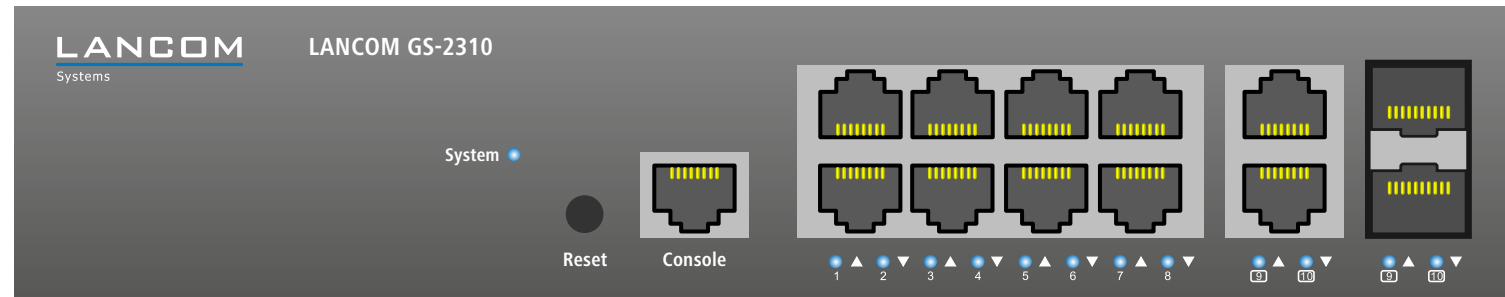

- ③ **SFP ports**
Insert a suitable SFP module (e.g. 1000Base-SX or 1000Base-LX) into the SFP port. Choose a cable compatible with the SFP module and connect it as described in the module's documentation.
- ④ **Power connector (on the back side of the device)**
Supply power to the device via the power connector on the back. Please use the supplied IEC power cable.



Please observe the following when setting up the device

- > Do not rest any objects on top of the device and do not stack multiple devices
- > For devices to be operated on the desktop, please attach the adhesive rubber footpads




- > Keep the ventilation slots on the side of the device clear of obstruction
- > Mount the device into a 19" unit in a server cabinet



Ports 9 and 10 are combo ports. Either the TP- or the SFP port can be used at the same time.

MOUNTING AND CONNECTING THE DEVICE

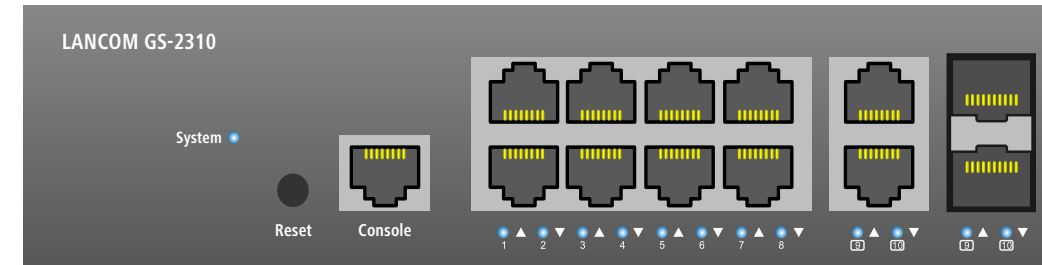

① System	
Off	Device switched off
Green	Device operational

② Reset button	
5 seconds pressed	Device restart
10 seconds pressed	Device reset and restart

③ TP Ethernet ports	
Off	Port inactive
Green	Link 1000 Mbps
Orange	Link ≤ 100 Mbps

④ SFP ports	
Off	Port inactive
Green	Link 1000 Mbps
Orange	Link ≤ 100 Mbps

Hardware	
Power supply	Internal power supply unit (110–230 V, 50-60 Hz)
Power consumption	max. 7.9 watts
Environment	Temperature range 0–40 °C; humidity 10–90 %; non-condensing
Housing	Robust metal housing with screw-on 19" mounting brackets, network connectors on the front
Number of fans	None; fanless design without rotating parts, high MTBF
Interfaces	
ETH	<ul style="list-style-type: none"> > 8 TP Ethernet-Ports 10 / 100 / 1000 Mbps > 2 Combo-Ports (TP / SFP) 100 / 1000 Mbps (SFP) and 10 / 100 / 1000 Mbps (TP) > 10 concurrent ports in total
Declaration of Conformity	
Hereby, LANCOM Systems declares that this device is in compliance with Directives 2014/30/EU and 2014/35/EU. The full text of the EU declaration of conformity is available at the following internet address: www.lancom-systems.com/ce/	
Package content	
Manual	Quick Reference Guide (DE/EN), Installation Guide (DE/EN), Cloud-ready sheet, FCC sheet
Mounting brackets	Two 19" brackets for rackmounting
Cable	IEC power cord, serial configuration cable 1.5 m